


REV	DATE	REVISION DETAILS	APPD
更改号	日期	更改内容	审核并批准
A	Mar.13.2020	Drawing Update	

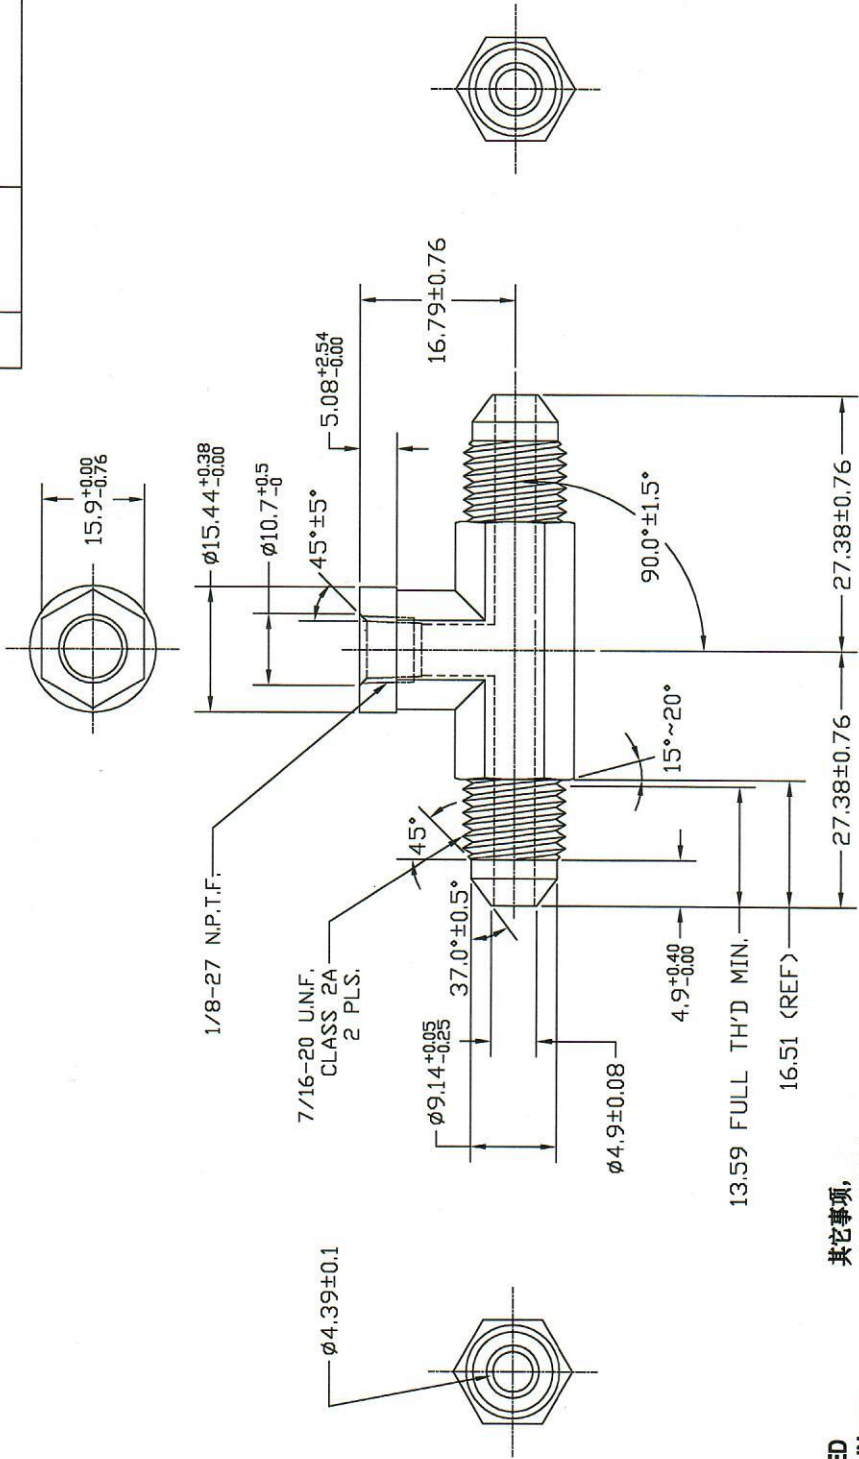

其它事项,  
 图示尺寸单位为mm,  
 未注加工表面粗糙度 Ra=3.2um,  
 未注角度公差 ±5°,  
 其它未注公差 (除角度外) 均按:  
 GB/T1804-2000(ISO2768-1)-m 和  
 GB/T1184-1996(ISO2768-2)-m

UNLESS SPECIFIED  
 ALL DIMENSIONS IN mm,  
 MACHINED SURFACES Ra=3.2um,  
 ANGLE TOLERANCES ±5°,  
 Other tolerance except angles,  
 in accordance with  
 GB/T1804-2000(ISO2768-1)-m  
 and GB/T1184-1996(ISO2768-2)-m

Zhejiang Gaocheng Autoparts Co.,Ltd

PART No 零件名 2602-04-04-02

SCALE: 批准	APPD: 批准	DRN: Sun Jianghuan 制图 20.03.13
MTS 日期	DATE: 日期	CHK: Li Jumbiao 审核 20.03.13

MATERIAL Chinese steel 45

FINISH Remove all sharp edges,burrs,silvers and swarf, break all edges 0.127-0.254mm.  
 ZINC PLATING WITH 8um MICRONS MINIMUM PLATING THICKNESS AND TRIVALENT CHROMATE PASSIVATION  
 AND WITHSTAND 96 HRS TO WHITE / 144 HS TO RED RUST IN SALT SPRAY TEST.  
 镀锌, 三价铬钝化, 银白色, 盐雾试验96小时无白锈, 144小时无红锈, 镀锌层厚度大于8um.  
 去除所有毛刺, 铁屑等残留物, 锐边倒钝0.127-0.254mm.