




螺母

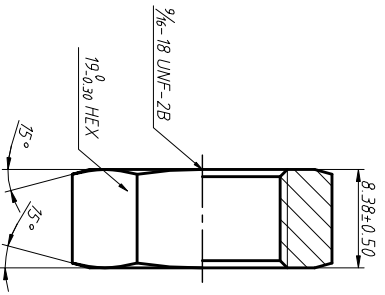

垫圈



REV	DATE	REVISION DETAILS	APPD
更改号 A	日期 JAN. 03. 2020	更改内容 drawing update	审核并批准

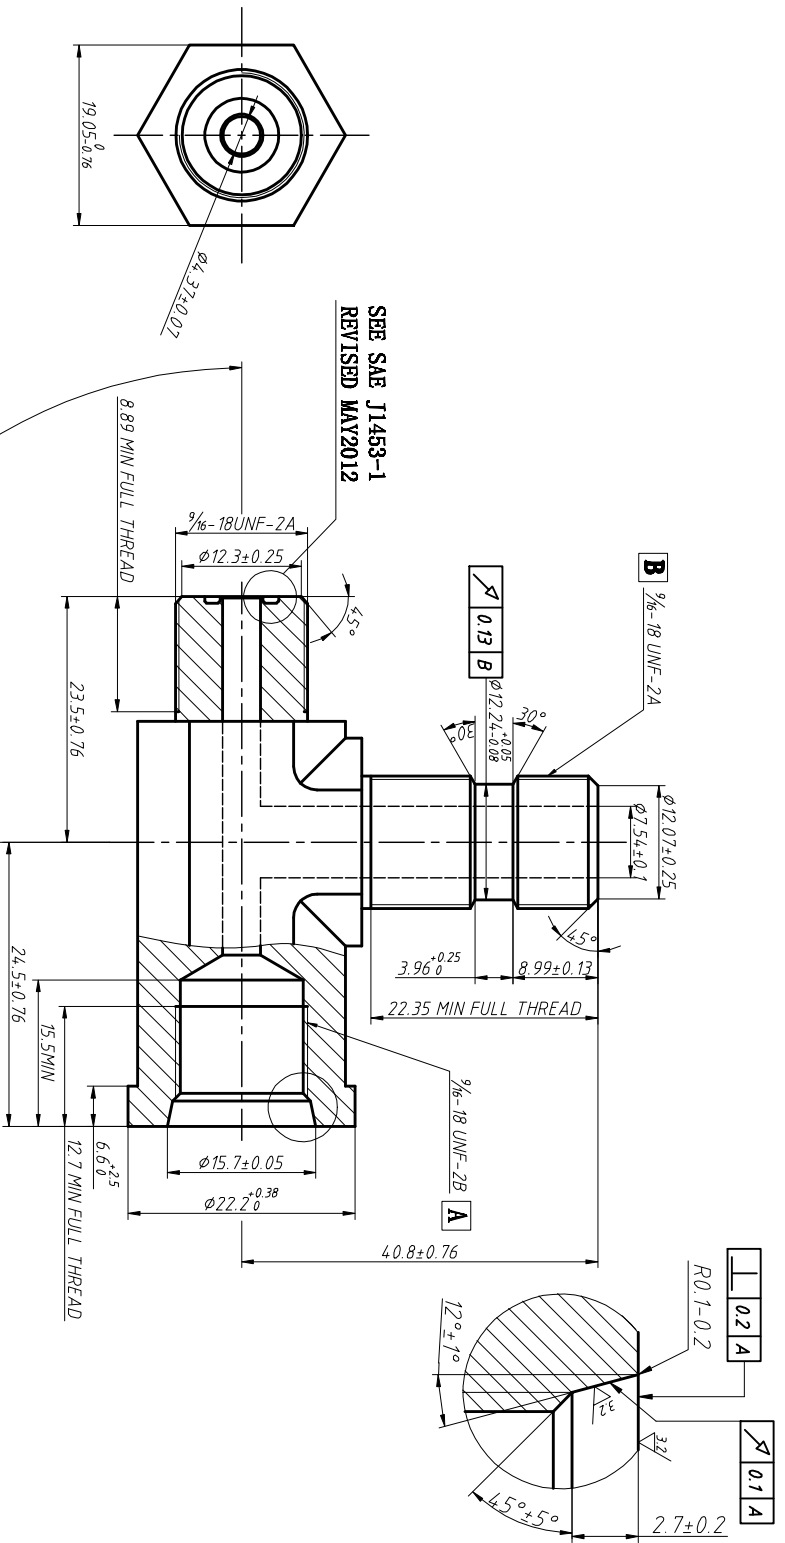

SEE SAE J1453-1
REVISED MAY2012

UNLESS SPECIFIED
ALL DIMENSIONS IN mm,
MACHINED SURFACES Ra=3.2um,
ANGLE TOLERANCES ±5°,
Other tolerance except angles,
in accordance with
GB/T1804-2000(ISO2768-1)-m
and GB/T1184-1996(ISO2768-2)-m

其它事项,
图示尺寸单位为mm,
未注加工表面粗糙度 Ra=3.2um,
未注角度公差 ±5°,
其它未注公差 (除角度外) 均按:
GB/T1804-2000(ISO2768-1)-m 和
GB/T1184-1996(ISO2768-2)-m

MATERIAL Chinese steel 45

FINISH Remove all sharp edges,burrs,slivers and swarf, break all edges 0.127-0.254mm.
ZINC PLATING WITH 8um MICRONS MINIMUM PLATING THICKNESS AND TRIVALENT CHROMATE PASSIVATION
AND WITHSTAND 96 HRS TO WHITE / 144 HS TO RED RUST IN SALT SPRAY TEST.

材质 45#

去油所有毛刺, 铁屑等残留物, 锐边倒钝0.127-0.254mm.
镀锌: 三价钝化, 银白色, 盐雾试验96小时无白锈, 144小时无红锈, 镀锌层厚度大于0.8um.

Zhejiang Gaocheng Autoparts Co., Ltd

PART No 零件名
40521-6PT-4FS-6NWO

SCALE: NTS	DATE: 日期	DRN: 制图	CHK: 审核
APPD: 批准	DATE: 日期	DRN: 余德胜	CHK: 詹永斌