


REV	DATE	REVISION DETAILS	APPD
更改号	日期	更改内容	审核并批准
①	16.06.14	7.54+/-0.10x24DP changed to Dia.11.3x24.5DP	

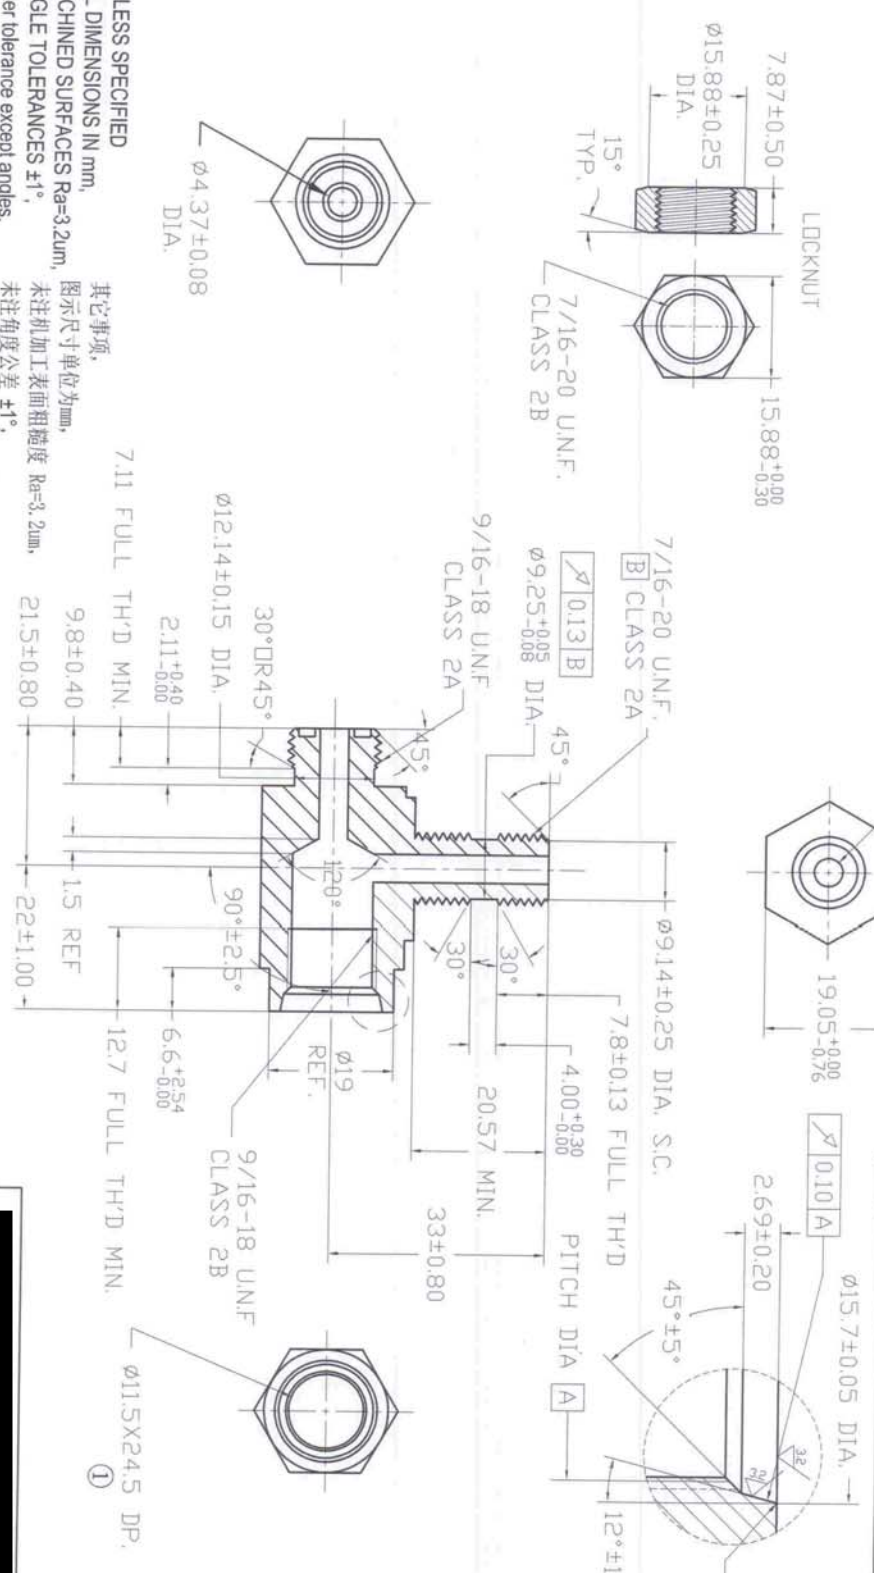

UNLESS SPECIFIED  
 ALL DIMENSIONS IN mm,  
 MACHINED SURFACES Ra=3.2um,  
 ANGLE TOLERANCES ±1°,  
 Other tolerance except angles,  
 in accordance with  
 GB/T1804-2000(ISO2768-1)-m  
 and GB/T1184-1996(ISO2768-2)-m

其它事项,  
 图示尺寸单位为mm,  
 未注加工表面粗糙度 Ra=3.2um,  
 未注角度公差 ±1°,  
 其它未注公差 (除角度外) 均按:  
 GB/T1804-2000(ISO2768-1)-m 和  
 GB/T1184-1996(ISO2768-2)-m

MATERIAL	Chinese steel 45	PART No	40749-6PT-4FS-4NWO
FINISH	Remove all sharp edges, burrs, slivers and snags, break all corners 0.127-0.254mm. ZINC PLATING WITH 7um MICRONS MINIMUM PLATING THICKNESS AND TRivalent CHROMATE PASSIVATION AND WITHSTAND 96 HRS TO WHITE / 144 HRS TO RED RUST IN SALT SPRAY TEST.	SCALE:	1:1
		DATE:	28/06/16
		CHK:	LJ Jumbiao
		APPD:	Zhang
		DRN:	LYongHua
		制图	2016.06.15
		审核	2016.06.15