


REV	DATE	REVISION DETAILS	APPD
①	2013.09.28	Add 2 - 8.5+/-0.25	Zhangjian
②	2013.09.28	Add 2 - Dia.22 +0.00/-0.15	Zhangjian

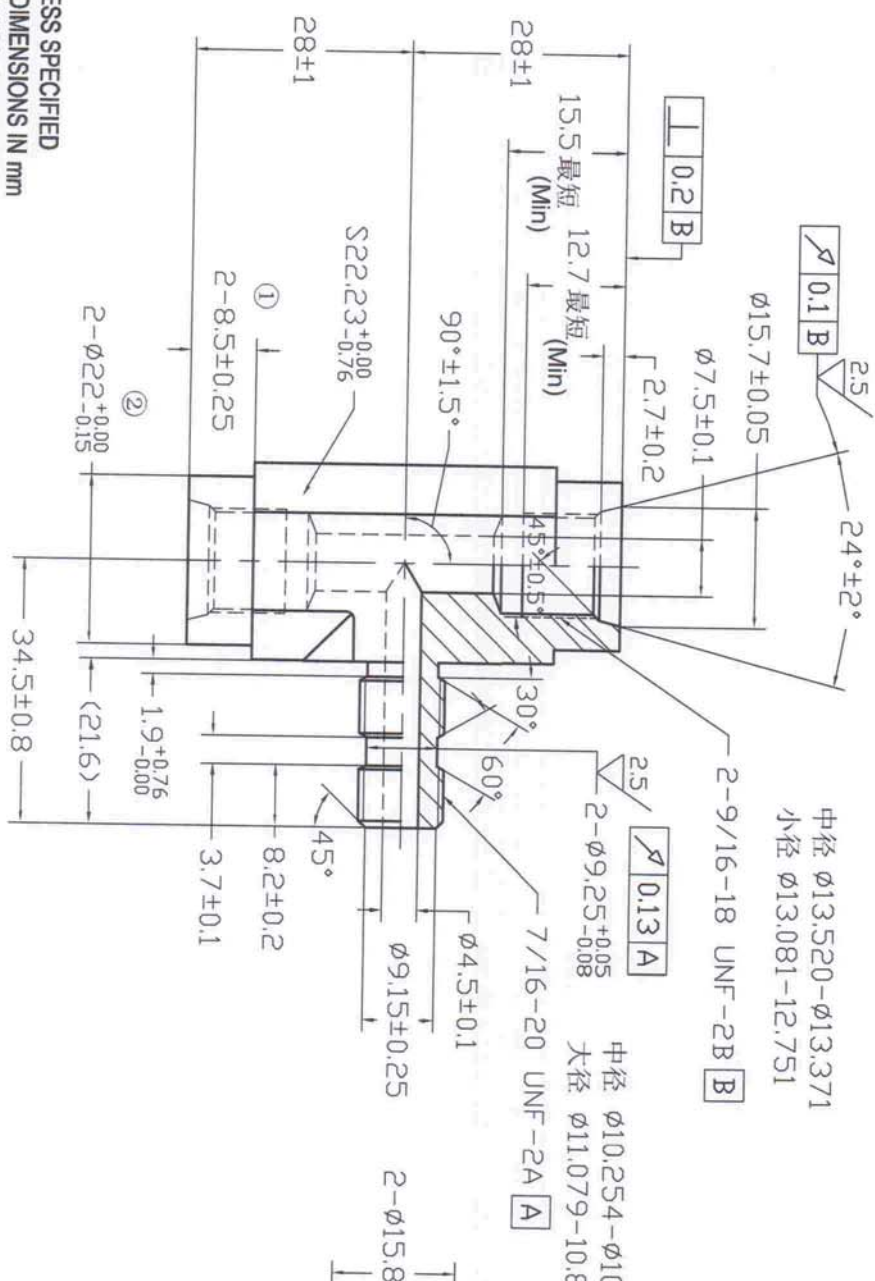

UNLESS SPECIFIED
ALL DIMENSIONS IN mm
MACHINED SURFACES Ra=3.2um
ANGLE TOLERANCES ±1°
DECIMAL TOLERANCES:
.X: ±0.5
.XX: ±0.25
.XXX ±0.127

垫圈的装配要求松紧合适，即装配后垫圈能轻松的用手推动垫圈，
但是当无外力作用时，垫圈不会任意的滑动

MATERIAL	Chinese steel 45
FINISH	Remove all sharp edges, burrs, slivers and swarf, break all edges 0.127-0.254mm. ZINC PLATED WITH TRIVALENT CHROMATE AND NO RED CORROSION IN 96 HOURS SALT SPRAY TEST.

PART No	40792-6pt-6pt-4nw		
SCALE:	APPD:	DRN:	
NTS	Zhangjian	Panda	
	DATE: 21/10/13	2013.09.28	
		CHK: Panda	
		2013.09.28	