


- 1.No sharp edges or burrs,break all corners 0.25x45degree.
- 2.Parts must be clean & oildipped for rust protection.
- 3.Minimum Hardness HB131.

1. 去毛刺锐边倒钝0.25x45度.
2. 零件内外清洁并镀油无锈迹.
3. 零件材料经过热处理, 交货时最小表面硬度为HB131.

REV 更改号	DATE 日期	REVISION DETAILS 更改内容	APPD 审核并批准
A	Feb. 16. 2018	Production issue	Zhangjian

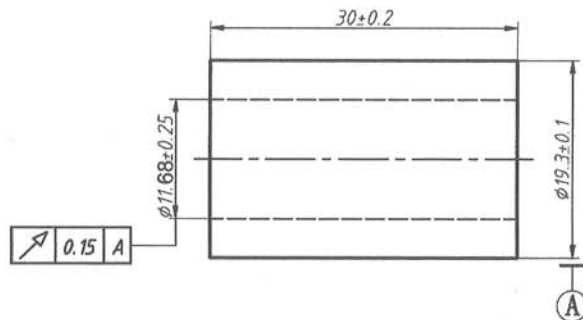

UNLESS SPECIFIED
ALL DIMENSIONS IN mm,
MACHINED SURFACES Ra=3.2um,
ANGLE TOLERANCES ±5°,
Other tolerance except angles,
in accordance with
GB/T1804-2000(ISO2768-1)-m
and GB/T1184-1996(ISO2768-2)-m

其它事项,
图示尺寸单位为mm,
未注机加工表面粗糙度 Ra=3.2um,
未注角度公差 ±5°,
其它未注公差 (除角度外) 均按:
GB/T1804-2000(ISO2768-1)-m 和
GB/T1184-1996(ISO2768-2)-m

Zhejiang Gaocheng Autoparts Co.,Ltd	
PART No 零件名	41370 SPACER
SCALE:	APPD: Zhangjian 批准
NTS	DRN: 余德胜 制图
	DATE: 2019. 02. 16 日期
	CHK: 詹永斌 审核

MATERIAL	Chinese steel 20
FINISH	Remove all sharp edges,burrs,slivers and swarf, break all edges 0.127~0.254mm. Bare steel with self colour , oil dipped. 去除所有毛刺, 铁屑等残屑物, 锐边倒钝0.127-0.254mm. 光身, 镀油.