


| REV 更改号 | DATE 日期 | REVISION DETAILS 更改内容 | APPD 审核并批准 |
|------------|----------------|--------------------------|---------------|
| A | JUNE. 18. 2019 | Production issue | Zhang |

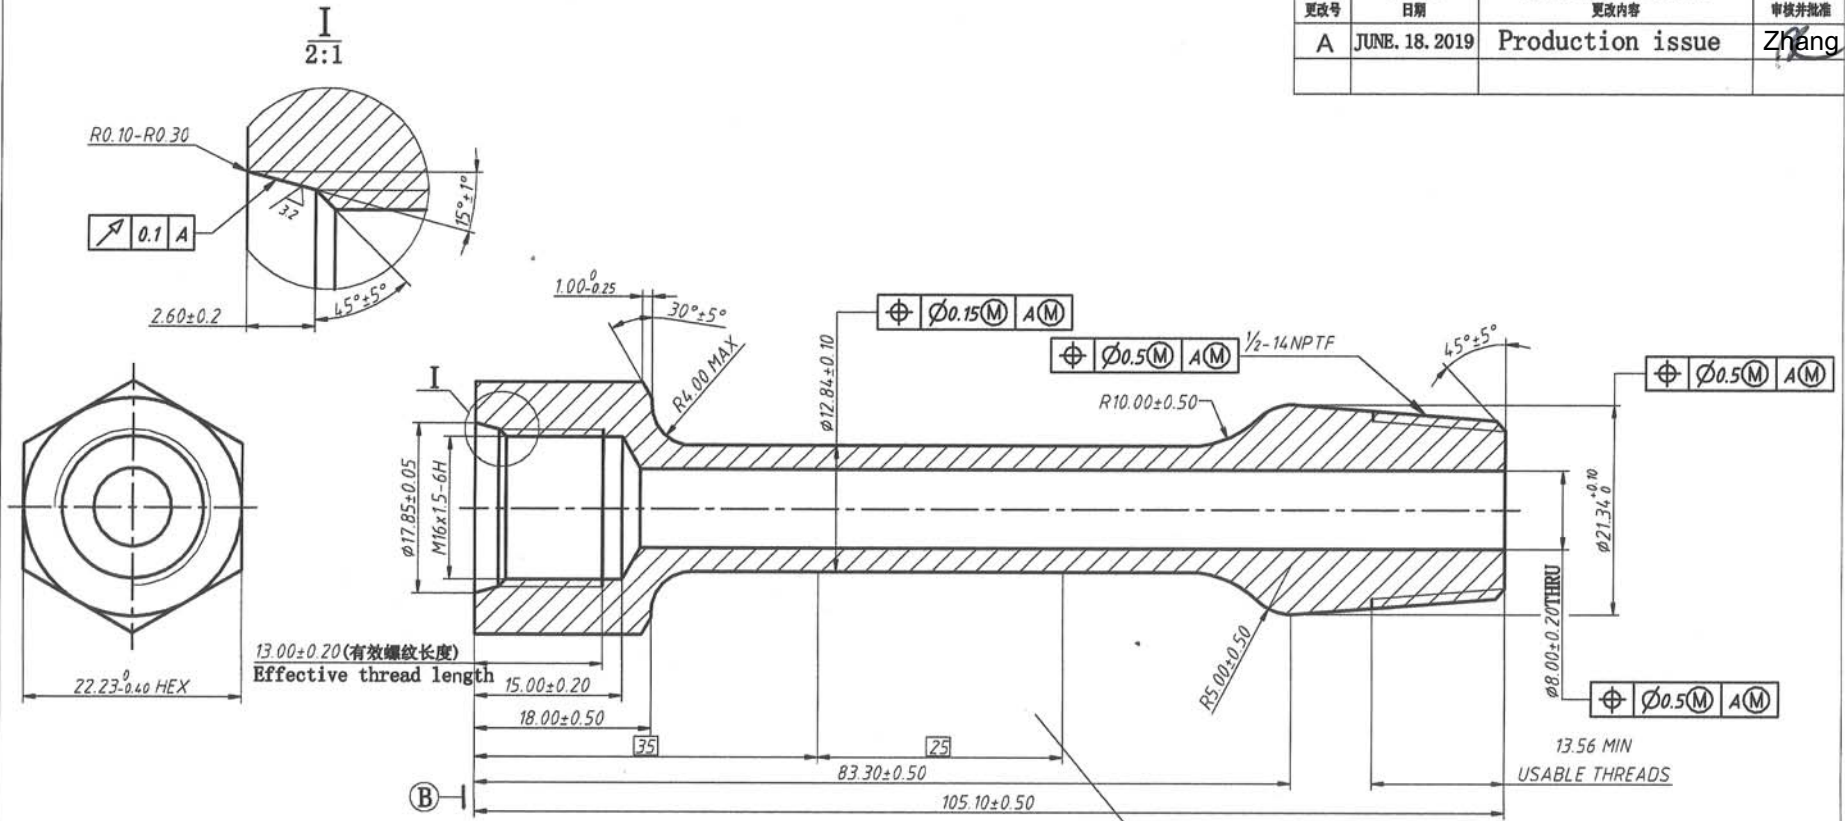

UNLESS SPECIFIED
ALL DIMENSIONS IN mm,
MACHINED SURFACES Ra=3.2um,
ANGLE TOLERANCES ±5°,
Other tolerance except angles,
in accordance with
GB/T1804-2000(ISO2768-1)-m
and GB/T1184-1996(ISO2768-2)-m

其它事项,
图示尺寸单位为mm,
未注机加工表面粗糙度 Ra=3.2um,
未注角度公差 ±5°,
其它未注公差 (除角度外) 均按:
GB/T1804-2000(ISO2768-1)-m 和
GB/T1184-1996(ISO2768-2)-m

2D data matrix barcode symbol and HRI text
per 18287 inside boundary. Marking method:
label (在此区域范围内贴上相关标签)

| Zhejiang Gaocheng Autoparts Co.,Ltd | |
|-------------------------------------|--------------------------|
| PART No 零件名 | 41399-STR-M16PT-8NPTF-LT |
| SCALE: | APPD: 批准: Zhang |
| NTS | DRN: 制图: 余德胜 |
| | DATE: 日期 2019.06.18 |
| | CHK: 审核: 詹永斌 |

| | | |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| MATERIAL | Chinese steel 20 | 材质 20# |
| FINISH | Remove all sharp edges,burrs,silvers and swarf, break all edges 0.127-0.254mm. ZINC PLATING WITH 8um MICRONS MINIMUM PLATING THICKNESS AND TRIVALENT CHROMATE PASSIVATION AND WITHSTAND 96 HRS TO WHITE / 144 HS TO RED RUST IN SALT SPRAY TEST. | 去除所有毛刺, 铁屑等残留物, 锐边倒钝0.127-0.254mm. 镀锌, 三价铬钝化, 银白色, 盐雾试验96小时无白斑, 144小时无红锈, 镀锌层厚度大于8um. |