



# FEITIAN AUTO PARTS

ADD: NO.9909,Hiker Park ,YiWu 322001,Zhejiang, China

# Company Profile



ZHEJIANG FEITIAN AUTO PARTS CO., LTD.




Zhejiang Feitian Auto Parts Co., Ltd is a professional and leading manufacturer of tubings and fittings in China.

We provide Purchase Service, Products Customization, Products Surface Treatment, Packing Design and Logistic Transportation. We have factories in Shaoxing, Ningbo and Nanjing.

We have regular customers across 30 countries, like USA, Canada, Mexico, Colombia, Ecuador, Australia, Thailand, Iran, Dubai, South Africa, Germany, England, Poland, Italy, France, Holland, Turkey and many of the world's most prestigious corporations, such as TSC TRACTOR SUPPLY, McMaster, USA SEALING, DIESEL TECHNIC AG, HERMON, IVECO, EFFEBI rely on us to meet their needs.

We represent some partners as their sole agent in China and attend several Fairs every year, such as CANTON FAIR, SHANGHAI AUTOMECHANIKA FAIR, ASIA PTC FAIR, BEIJING AMR FAIR...

Customer satisfaction is our eternal corporation pursue..

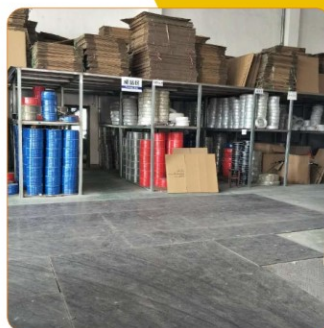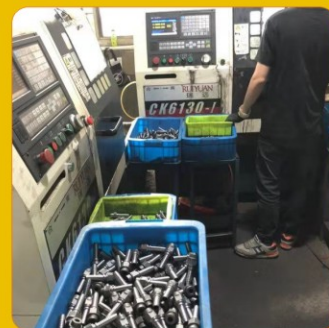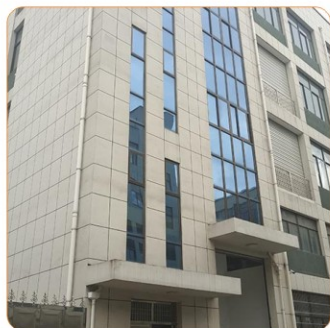



## 2013

And in order to receive remittances from foreign customers quickly, safe and conveniently, we applied for the establishment of Zhejiang Feitian Auto Parts Co., Ltd. and the opening of an US dollar account in Hong Kong in 2013.

## 2008

Zhejiang Feitian Auto Parts Co., Ltd. was founded in Shaoxing in 2008. Feitian company takes itself as a technical manufacturer of nylon tubing, pu hose ,air brake coils and trailer cables.

## 2014

In order to attract and get more foreign businessmen from the market, to provide some purchasing agents to some old customers, to purchase gifts, toys and other small commodities and to provide sample service for customers more quickly and economically, Feitian sets up its marketing department in Yiwu International Trade City in 2014 .


## 2016


Feitian invested in the establishment of its branch company, YiWu Tangpu Trade CO.,LTD.

## 2019

Feitian renamed Yiwu Tangpu Trading Co., Ltd. to Yiwu Vanzon Import and Export Co., Ltd.

# Air Brake Hose Series

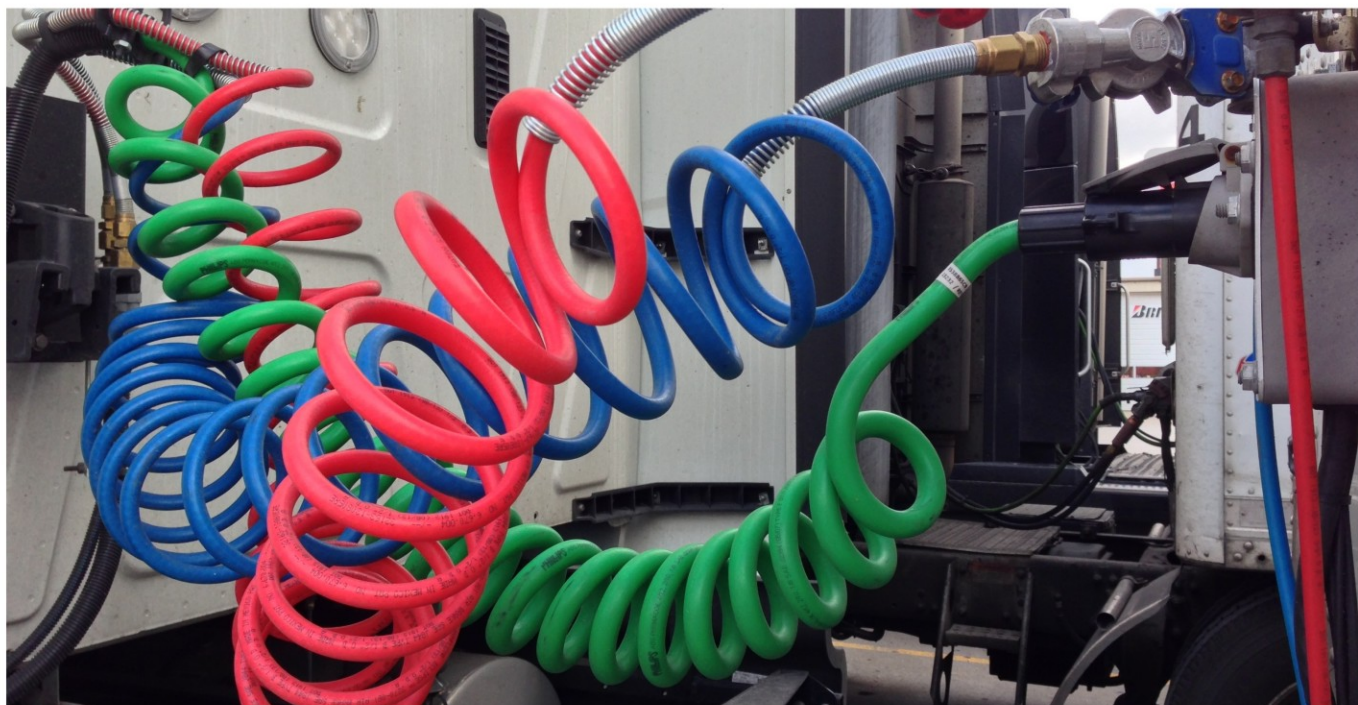



	PA6 TUBE					
	Specifications Meets DIN73378, DIN74324 Temperature range: -15°C to 100°C Diameter tolerances: ±0.1mm or better (varies by size) Suggested fittings: push-in, compression					
part no.	Dimension			W.P.	B.P.	Bending Radius
	O.D.	I.D.	Wall thickness	bar	bar	mm
PA60402A	4mm	2mm	1mm	35	65	20
PA60604A	6mm	4mm	1mm	32	63	40
PA60806A	8mm	6mm	1mm	30	57	50
PA61008A	10mm	8mm	1mm	26	52	65
PA61209A	12mm	9mm	1.5mm	28	57	70
PA61410A	14mm	10mm	2mm	25	52	85
PA61512A	15mm	12mm	1.5mm	25	52	90
PA61612A	16mm	12mm	2mm	22	48	120
PA61/8A	1/8"	1.7mm	0.75mm	36	68	15
PA65/32A	5/32"	1.9mm	1mm	35	65	20
PA63/16A	3/16"	2.7mm	1mm	33	65	35
PA61/4A	1/4"	4.3mm	1mm	32	63	40
PA65/16A	5/16"	5.9mm	1mm	30	57	50
PA63/8A	3/8"	6.5mm	1.5mm	28	56	65
PA61/2A	1/2"	9.7mm	1.5mm	27	54	80
PA65/8A	5/8"	11.2mm	2.3mm	22	48	120
PA63/4A	3/4"	14mm	2.5mm	20	46	150



# Air Brake Hose Series



	PA12 TUBE					
	Specifications Meets DIN73378, DIN74324, SAE J844, DOT Temperature range: -40°C to 120°C Diameter tolerances: ±0.1mm or better (varies by size) UV stabilized Suggested fittings: push-in, compression					
part no.	Dimension			W.P.	B.P.	Bending Radius
	O.D.	I.D.	Wall thickness	bar	bar	mm
PA120402A	4mm	2mm	1mm	35	65	20
PA120604A	6mm	4mm	1mm	32	63	40
PA120806A	8mm	6mm	1mm	30	57	50
PA121008A	10mm	8mm	1mm	26	52	65
PA121209A	12mm	9mm	1.5mm	28	57	70
PA121410A	14mm	10mm	2mm	25	52	85
PA121512A	15mm	12mm	1.5mm	25	52	90
PA121612A	16mm	12mm	2mm	22	48	120
PA121/8A	1/8"	1.7mm	0.75mm	36	68	15
PA125/32A	5/32"	1.9mm	1mm	35	65	20
PA123/16A	3/16"	2.7mm	1mm	33	65	35
PA121/4A	1/4"	4.3mm	1mm	32	63	40
PA125/16A	5/16"	5.9mm	1mm	30	57	50
PA123/8A	3/8"	6.5mm	1.5mm	28	56	65
PA121/2A	1/2"	9.7mm	1.5mm	27	54	80
PA125/8A	5/8"	11.2mm	2.3mm	22	48	120
PA123/4A	3/4"	14mm	2.5mm	20	46	150

	Double Layer Nylon Tubing					
	Specifications Meets SAE J844 Temperature range: -40°C to 120°C Vacuum rating: to 28" Hg Diameter tolerances: ±0.1mm or better (varies by size) Hardness: 78 Rockwell R Tube markings: D.O.T. specs UV stabilized Suggested fittings: push-in, compression					
part no.	Dimension			W.P.	B.P.	Bending Radius
	O.D.	I.D.	Wall thickness	bar	bar	mm
PA1206B	6mm	3.8mm	1.1mm	38	75	45
PA1208B	8mm	5.4mm	1.3mm	36	70	55
PA1210B	10mm	7mm	1.5mm	35	68	65
PA1212B	12mm	8.8mm	1.6mm	34	66	75
PA1215B	15mm	11mm	2mm	33	62	95
PA1216B	16mm	11.4mm	2.3mm	32	60	120
PA121/4B	1/4"	4.1mm	1.1mm	38	75	45
PA125/16B	5/16"	5.3mm	1.3mm	36	70	70
PA123/8B	3/8"	6.3mm	1.5mm	35	68	70
PA121/2B	1/2"	9.5mm	1.6mm	34	66	80
PA125/8B	5/8"	11.3mm	2.3mm	32	60	120
PA123/4B	3/4"	14mm	2.5mm	28	52	150

# Air Brake Hose Series



VZ1001	VZ1002	VZ1003	VZ1004
VZ1005	VZ1006	VZ1007	VZ1008
VZ1009	VZ1010	VZ1011	VZ1012
VZ1100	VZ1101	VZ1102	VZ1103
VZ1104	VZ1105	VZ1106	VZ1107
VZ1108	VZ1109	VZ1110	VZ1111




			
VZ1112	VZ1113	VZ1114	VZ1115
			
VZ1116	VZ1117	VZ1118	VZ1119
			
VZ1200	VZ1201	VZ1202	VZ1203
			
VZ1204	VZ1205	VZ1206	VZ1207
			
VZ1208	VZ1209	VZ1210	VZ1211
			
VZ1212	VZ1213		


			
VZ1300	VZ1301	VZ1302	VZ1303
			
VZ1304	VZ1305	VZ1306	VZ1307
			
VZ1400	VZ1401	VZ1402	VZ1403
			
VZ1405	VZ1406	VZ1407	VZ1408
			
VZ1500	VZ1600	VZ1700	VZ1800








## Pneumatic Tubing Fittings & Accessories

	PU TUBE					
	Specifications Temperature range: approximately 0°C to 60°C Dimension: O.D range from 3mm to 20 mm					
part no.	Dimension			W.P.	B.P.	Bending Radius
	O.D.	I.D	Wall thickness	bar	bar	mm
MCPT0302	3	2	0.5mm	6	18	6
MCPT'0425	4	2.5	0.75mm	6	18	8
MCPT0503	5	3	1mm	6	18	8
MCPT'0604	6	4	1mm	5	15	10
MCPT'0805	8	5	1.5mm	5	15	15
MCPT'0855	8	5.5	1.25mm	4	12	17
MCPT'0806	8	6	1mm	3	10	18
MCPT'1065	10	6.5	1.75mm	5	15	20
MCPT'1280	12	8	2mm	5	15	28
MCPT'1410	14	10	2mm	4	12	35
MCPT'1612	16	12	2mm	4	12	50
MCPT1613	16	13	1.5mm	3	10	60
MCPT1/8	3.2	2	0.6mm	6	18	6
MCPT5/32	3.9	2.5	0.7mm	5	15	8
MCPT1/4	6.3	4.5	0.9mm	4	12	12
MCPT5/16	7.9	5	1.45mm	5	15	15
MCPT3/8	9.5	6.5	1.5mm	4	12	20
MCPT1/2	12.7	9.5	1.6mm	4	12	32

	PU Reinforced Tube					
	Specifications Temperature range: approximately 0°C to 60°C Dimension: O.D range from 6mm to 20 mm					
part no.	Dimension			W.P.	B.P.	Bending Radius
	O.D.	I.D	Wall thickness	bar	bar	mm
PUR0805	8mm	5mm	1.5mm	20	60	20
PUR1065	10mm	6.5mm	1.75mm	18	50	25
PUR1208	12mm	8mm	2mm	18	50	35
PUR1410	14mm	10mm	2mm	15	45	45
PUR1612	16mm	12mm	2mm	15	45	70

	PU Twin Hose					
	Specifications Temperature range: approximately 0°C to 60°C Dimension: O.D range from 6mm to 20 mm					
part no.	Dimension			W.P.	B.P.	Bending Radius
	O.D.	I.D	Wall thickness	bar	bar	mm
PUH0425	4mm	2.5mm	0.75mm	6	18	8
PUH0604	6mm	4mm	1mm	5	15	10
PUH0805	8mm	5mm	1.5mm	5	15	15

	PU ANTI-SPARK HOSE					
	High wear resistance composite tube Smooth, without indentation Excellent elasticity, wide range of applicable temperature Agree to UL-94 standard VW-0 Suitable for welding area or high temperature environment					
part no.	Dimension			W.P.	B.P.	Bending Radius
	O.D.	I.D	Wall thickness	bar	bar	mm
MCPT'0425	4mm	2.5mm	0.75mm	10	30	16
MCPT'0604	6mm	4mm	1mm	10	30	22
MCPT'0805	8mm	5mm	1.5mm	10	30	32
MCPT'1065	10mm	6.5mm	1.75mm	10	25	38
MCPT'1280	12mm	8mm	2mm	10	25	46
MCPT'1410	14mm	10mm	2mm	8	20	52
MCPT'1612	16mm	12mm	2mm	8	20	82

		PU ROUND BELT		
		1. High tension resistance ,tensile strength . 2.Wide range of temperature 3.Hard to stretch ,length can be easily cut, can be connected after slightly heated .. 4.Agree to ROHS environment protection requirement .		
part no.		Size		Weight
		mm	Length	
			M	g/m
METRIC SYSTEM	PURBS03	3	200	8.6
	PURBS04	4	200	15.4
	PURBS05	5	200	24
	PURBS06	6	200	35
	PURBS08	8	100	60





## MULTICORE PU TUBE

Features: Composed by two or multiple row of PU or PVC tubes, with variety of colors for better distinction. Included with several PA PU PE tubes inside, and covered with PVC or TPU, anti-wear. space saving. Multiple row hose composed by multiple row of PU or PVC tubes, with variety of colors for better distinction.

Application: Can be used for robot, industrial robots and mining etc.

part no.	Dimension			W.P.	B.P.	Bending Radius
	O.D.	I.D	Wall thickness	bar	bar	mm
MCPT0302	3	2	0.5mm	6	18	6
MCPT'0425	4	2.5	0.75mm	6	18	8
MCPT0503	5	3	1mm	6	18	8
MCPT'0604	6	4	1mm	5	15	10
MCPT'0805	8	5	1.5mm	5	15	15
MCPT'0855	8	5.5	1.25mm	4	12	17
MCPT'0806	8	6	1mm	3	10	18
MCPT'1065	10	6.5	1.75mm	5	15	20
MCPT'1280	12	8	2mm	5	15	28
MCPT'1410	14	10	2mm	4	12	35
MCPT'1612	16	12	2mm	4	12	50
MCPT1613	16	13	1.5mm	3	10	60
MCPT1/8	3.2	2	0.6mm	6	18	6
MCPT5/32	3.9	2.5	0.7mm	5	15	8
MCPT1/4	6.3	4.5	0.9mm	4	12	12
MCPT5/16	7.9	5	1.45mm	5	15	15
MCPT3/8	9.5	6.5	1.5mm	4	12	20
MCPT1/2	12.7	9.5	1.6mm	4	12	32



## PE TUBE

Features:

Made of imported Russian polyethylene (100% PE); with excellent flexibility, small bending radius, winding resistance; high elastic recovery memory effect; excellent chemical properties, corrosion-free oil; can be welded; flame retardant, non-toxic and tasteless.

part no.	Dimension			W.P.	B.P.	Bending Radius
	O.D.	I.D	Wall thickness	bar	bar	mm
PE0425	4mm	2.5mm	0.75mm	10	20	10
PE0604	6mm	4mm	1mm	10	20	15
PE0805	8mm	5mm	1.5mm	10	20	20
PE1065	10mm	6.5mm	1.75mm	10	20	25
PE1208	12mm	8mm	2mm	10	20	35
PE1410	14mm	10mm	2mm	10	20	55
PE1612	16mm	12mm	2mm	10	20	80
PE1/8	1/8"	1/16"	0.8mm	10	20	8
PE5/32	5/32"	0.106	0.6mm	10	20	12
PE1/4	1/4"	0.17	1mm	10	20	15
PE5/16	5/16"	3/16"	1.6mm	10	20	20
PE3/8	3/8"	1/4"	1.6mm	10	20	25
PE1/2	1/2"	3/8"	1.6mm	10	20	35
PE5/8	5/8"	1/2"	1.6mm	10	20	80

			
VZ2001	VZ2002	VZ2003	VZ2004
			
VZ2005	VZ2006	VZ2007	VZ2008
			
VZ2100	VZ2101	VZ2102	VZ2103
			
VZ2104	VZ2105	VZ2106	VZ2107
			
VZ2108	VZ2109	VZ2110	VZ2111
			
VZ2112	VZ2113	VZ2114	VZ2115

			
VZ2116	VZ2117	VZ2118	VZ2119
			
VZ2120	VZ2130	VZ2200	VZ2201
			
VZ2202	VZ2203	VZ2204	VZ2205
			
VZ2206	VZ2207	VZ2208	VZ2209
			
VZ2208	VZ2209	VZ2210	VZ2211
			
VZ2212	VZ2213	VZ2300	VZ2301



## PE TUBE for Water Purifier Machines



### Specifications:

Material: PE

Color: White

Length: 100 m

Sizes: 1/4 ", 3/8" ,1/2" and others.

Standard: NSF

### Features:

- Using in connecting water purifiers, pure water machine, pipe machine etc
- Apply to Reverse Osmosis Water System and Housing In Line Filters ETC.
- Good flexibility, easy to install
- Sealing is good, will not leak
- Fit to all kinds of outer diameter with 1/4 inch
- Brand new and high quality
- PE range of plastic tubing is designed in linear low density Polyethylene for cold and intermittent hot water applications.
- Our tubing provides the benefits of a wide of temperature and pressure suitability, broad chemical compatibility and is made from non contaminating materials.

			
VZ3001	VZ3002	VZ3003	VZ3004
			
VZ3005	VZ3006	VZ3007	VZ3008
			
VZ3009	VZ3010	VZ3011	VZ3012
			
VZ3013	VZ3014	VZ3015	VZ3016

## COMPRESSED AIR TUBING PIPING SYSTEM MASTER KIT

WYNNISKY COMPRESSED AIR TUBING PIPING SYSTEM MASTER KIT.  
WORKSHOP / GARAGE COMPLETE AIRLINE SYSTEM. 1/2" NYLON TUBINGX 100 FEET





### Home Garage Compressed Air Pipe System

This is a complete air line piping system for your shop or garage. This air distribution kit is made to install on the wall or inside of it! This kit includes 1/2" outside diameter, 3/8" inside diameter nylon tubing that allows for 60 CFM flow at a 20ft length and 25CFM at 100 ft with a working pressure of 150 PSI. This tubing attaches to aluminum distribution blocks with easy to use push lock fittings. This system is an incredibly easy way to conveniently get an air supply throughout your shop without dragging hoses around. This complete kit is very easy and quick to install!


#### Features:

- 100 ft. of tubing
- 1/2" outside tubing diameter, 3/8" inside diameter
- Includes solid aluminum professional looking distribution blocks
- Includes push lock fittings
- Includes tubing cutter
- Easy to install
- Provides easy access to compressed air line

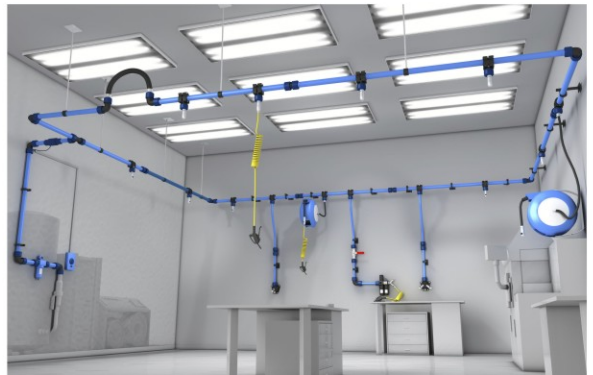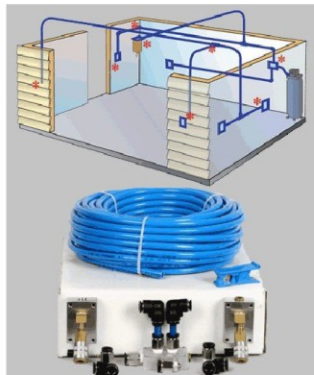






	<p><b>PU Insulation PEXA Pipe</b></p> <p>PU insulated PEXA PIPE is an ideal hydronic distribution pipe. It consists of PEXa O2 Barrier pipe surrounded by foam insulation and a durable corrugated PE outer jacket. The smooth interior wall of the carrier pipe provides superior flow and resists mineral build-up.</p> <p>Perfect for distribution to snow and ice melting areas, it is also an ideal pipe for:</p> <ul style="list-style-type: none"> <li>District heating</li> <li>Chilled water</li> <li>Process piping</li> <li>Hydronic piping</li> <li>Geothermal</li> <li>Outdoor wood boilers</li> </ul>
---	---





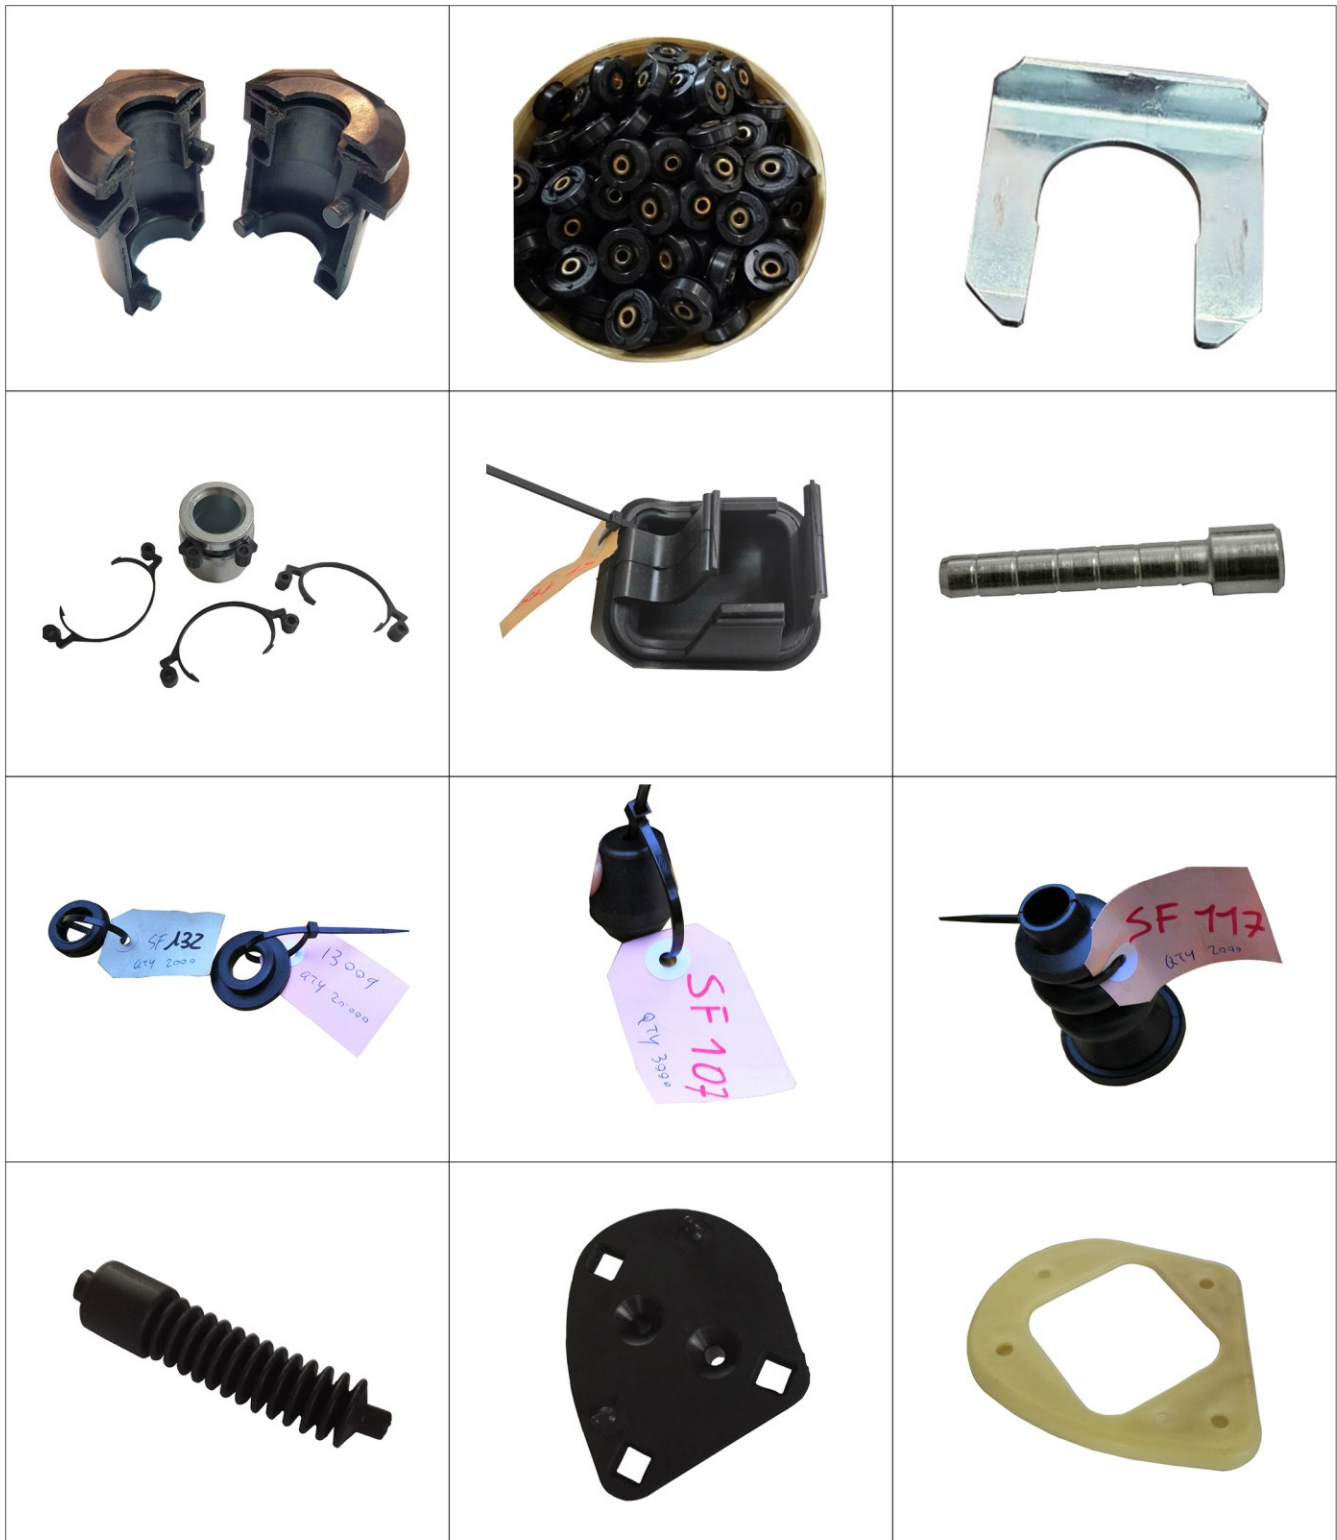



















			
VZ5001	VZ5002	VZ5003	VZ5004
			
VZ5005	VZ5006	VZ5007	

We have long-term cooperation between rubber manufacturers and plastic suppliers, can quickly, effectively and competitively provide mold opening and manufacturing products. We have many years of cooperation in the printing plant, can provide product design and packaging differentiation services.





We provide purchasing agency service, can purchase any products for customers. We have more than ten years of experience in purchasing automotive parts, pneumatic products, rubber products, plastic products, metal products and promotional gifts, jewelry and toys. We can provide customers with efficient, fast and competitive solutions.





**NO.9909, Hiker Park, YiWu 322001,  
Zhejiang, China.**



**0086 13777067663**



**452075997**



**[gavin@zjfeitian.com](mailto:gavin@zjfeitian.com)**

**ZHEJIANG FEITIAN AUTO PARTS CO.,LTD**  
**[www.zjfeitian.com](http://www.zjfeitian.com) [www.hosemfg.com](http://www.hosemfg.com)**